
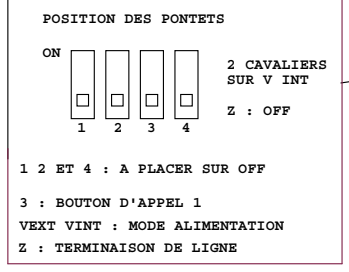
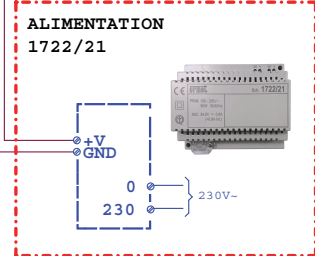
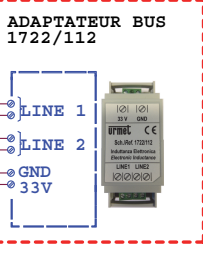
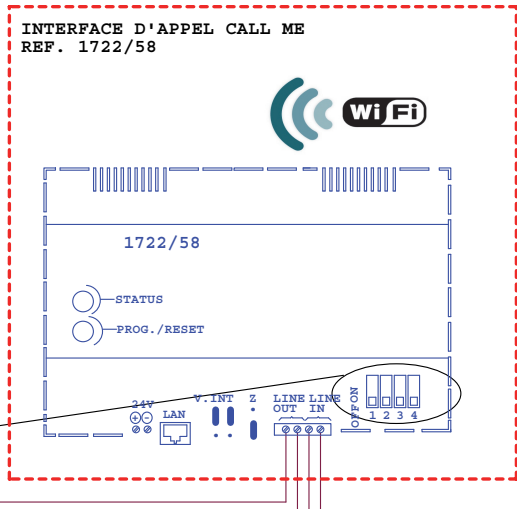
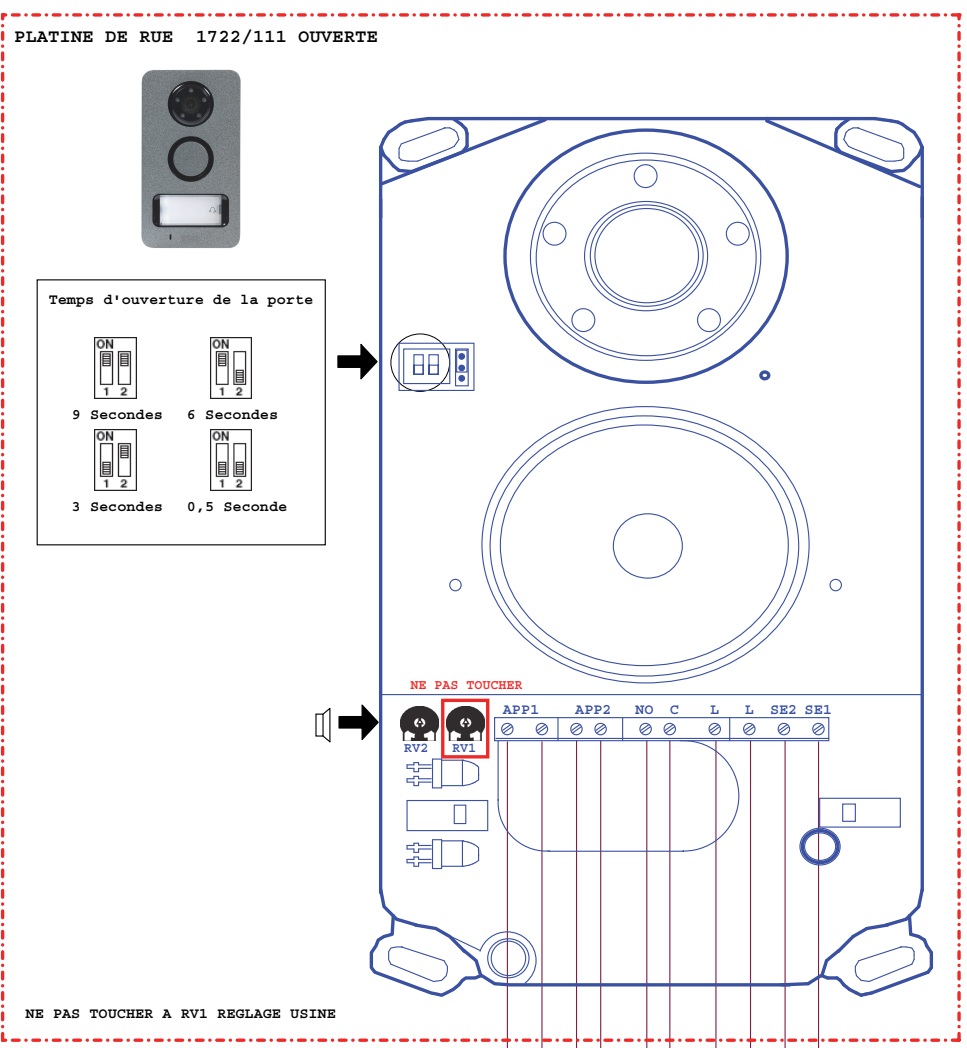
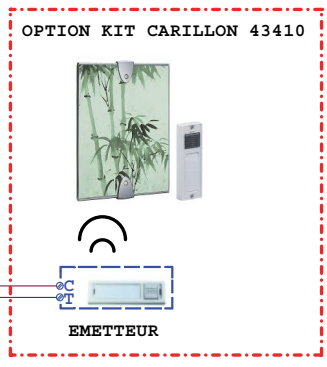
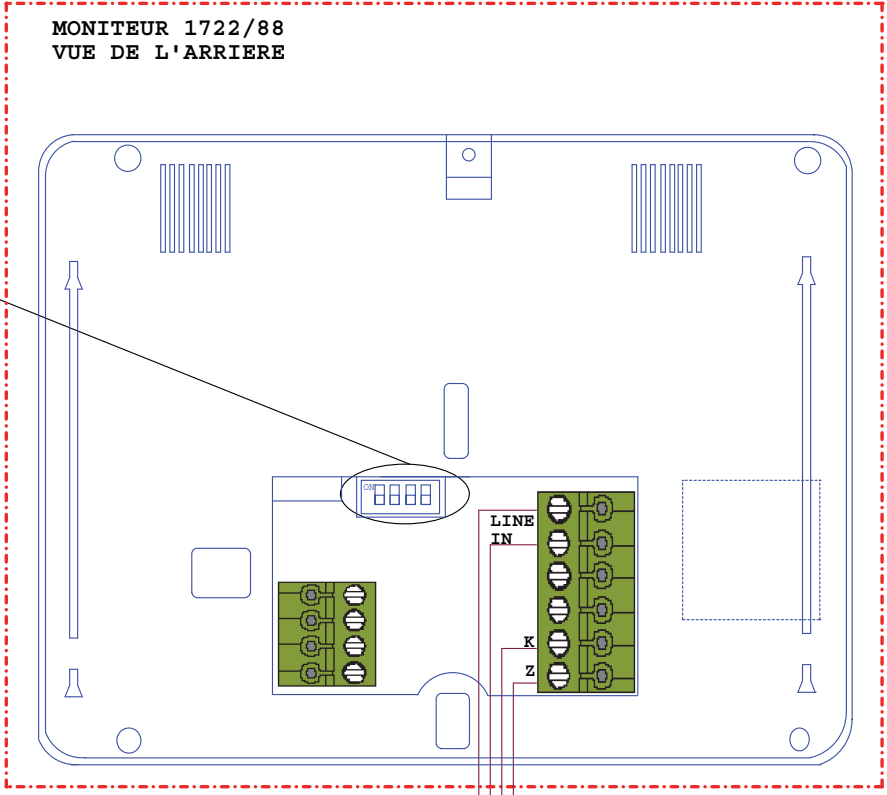


Câble Liaison	Type de câble					
	2Voice Réf. 1083/90	SYT1 Ø0.8mm AWG20	CAT5/CAT6	Téléph. (Ø0.6mm) AWG22 sans gaine	Câble 0.5mm² Simple	Câble 0.75mm² AWG18 Simple
A - B	150 m	130 m	80 m	100 m	60 m	100 m
C1 - C2	0,5 m	0,5m	0,5 m	0,5 m	0,5 m	0,5 m
A - OP1	20 m	10 m	10 m	10 m	10 m	10 m
A - OP4	50 m	50 m	30 m	50 m	50 m	50 m
A - OP5	20 m	10 m	10 m	10 m	10 m	10 m
A - OP6	20 m	10 m	10 m	10 m	10 m	10 m
B - OP2	30 m	30 m	30 m	30 m	30 m	10 m

bornes raccord.	Etat	Repos	Appel	Communication
Line		34.1	33.7	33.3
K - Z		2.3	5.2	2.3

bornes raccord.	Etat	Repos	Appel	Communication
Line		34.1	33.7	33.3
AP1		11.76		
AP2		identique à C NO		

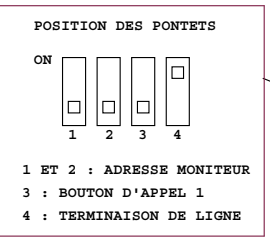

NOTA (*) : Utiliser un câble Indépendant.

Le schéma n'est valable qu'avec les références produits indiquées. Pour toute modification, veuillez prendre contact avec le service technique.

- CONTACT SEC PORTAIL max 1A - 30V
- BP DE SORTIE PORTAIL
- BP DE SORTIE SERRURE